


> 3–10m Small Tent Series

小型A型篷房跨度主要有3米，6米，8米和10米，采用48*84mm或48*100mm为主要型材，3米一间，常规檐高2.5米。常用于小型的聚会派对、婚礼或仓储。常用配套包括：透明PVC窗户，硬体墙，地板，纱幔等。

Small sized A shaped tent is 3m, 6m, 8m and 10m, which uses 48*84mm or 48*100mm aluminum alloy as main frame. The standard eave height is commonly 2.5m. Standard bay distance is 3 meters. Usually it is applicable for small party weddings and warehouse. Customers can choose below facilities: clear PVC window, hard walls, floor, curtains., etc.

截面图 Cross section view

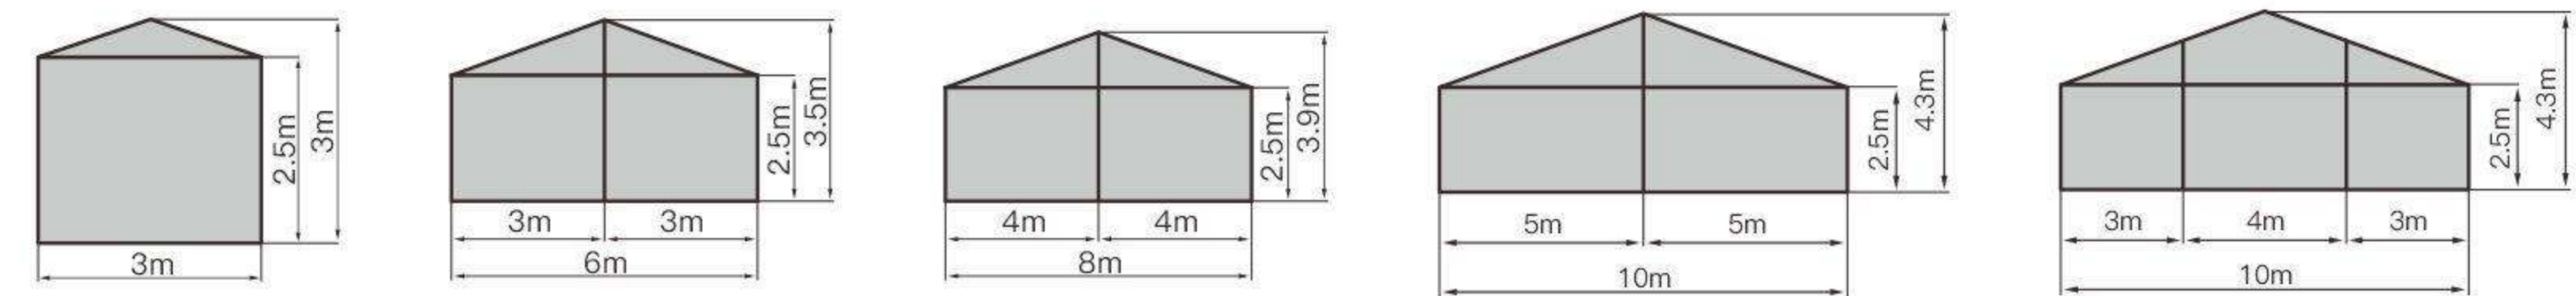

框架规格 Specification




跨度 Clear-span width	3m/6m/8m/10m
边高 Eave height	2.5m
顶高 Ridge height	3m/3.5m/3.9m/4.3m
间距 Bay distance	3m
坡度 Roof pitch	20°
最长件 Longest component	3m/3.5m/4.3m/5.4m
最小长度 Minimum length	3m
最大长度 Maximum length	无限制 No limited
风荷载 Max allowed windspeed	80公里/小时 80km/h

篷布规格 Cover Material

PVC篷布 PVC polyester textile
双面涂层PVC布，650–850g/m² 防火阻燃，符合DIN4102、M2和B1标准
Double coated PVC polyester textile. Flame retardant to DIN 4102,M2, Grade B1. Weight of fabric is 650g/sqm, 750g/sqm or 850g/sqm.

可选配件 Optional Accessories

• 布幔 Curtain lining	• 空调 Air conditioner
• 灯具 Lighting	• 钢钎 Steel nails
• 玻璃门 Glass doors	• 地毯 Carpet
• 天沟布 Rain gutter	• 透明布 Transparent PVC cover and sidewall
• 地板系统 Floorings	• 承重盘 Weight plate
• 透明窗户 PVC window sidewalls	• ABS墙体 ABS walls
• 玻璃墙体 Glass walls	• 三明治墙体 Sandwich walls

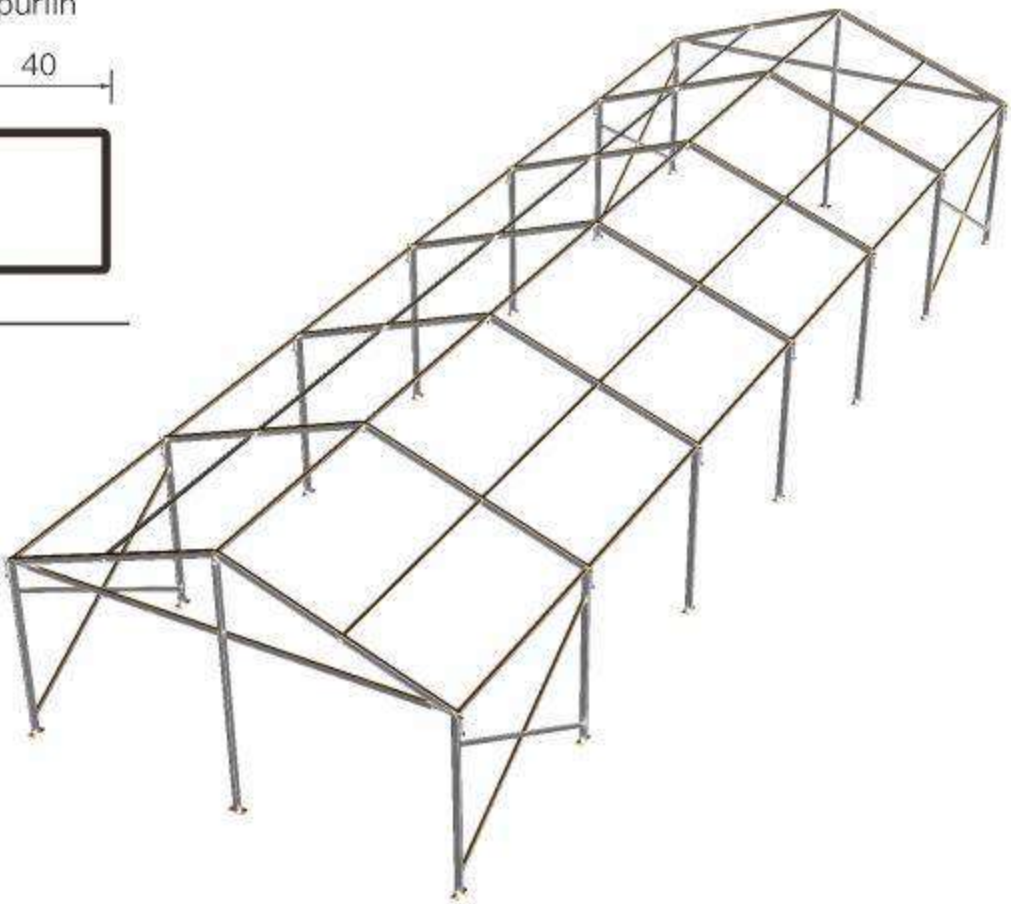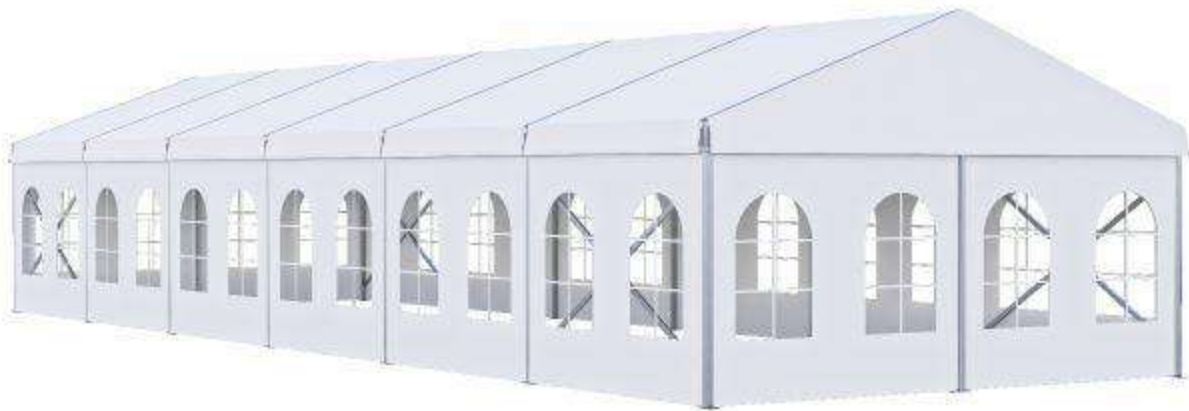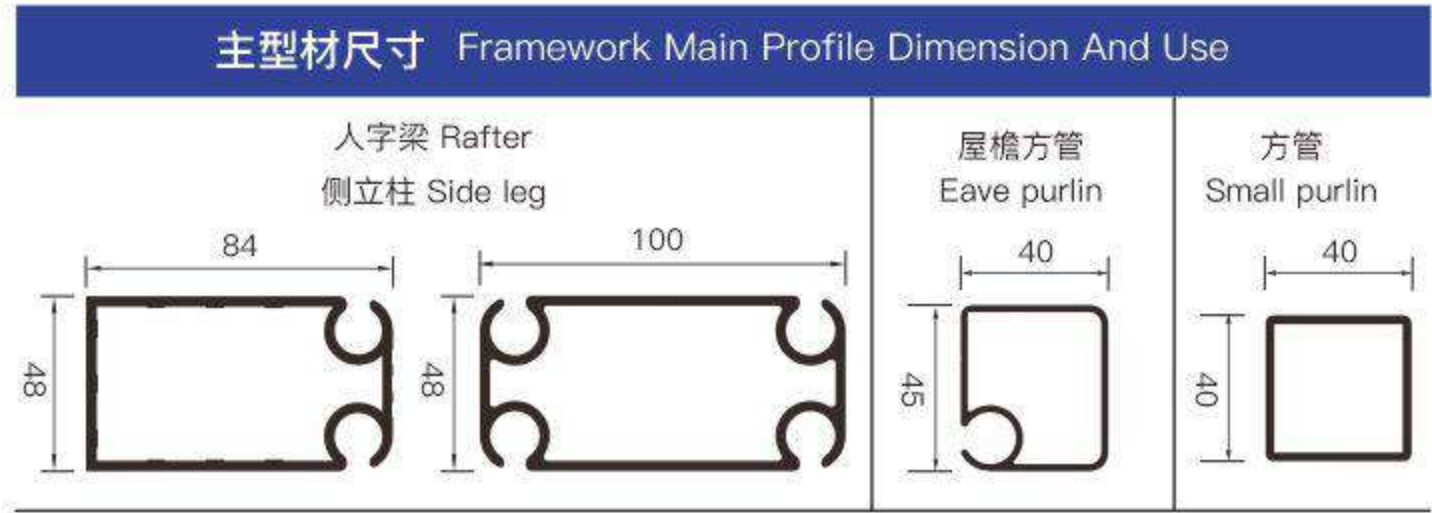


> 10–13m Middle Tent Series

中型A型篷房跨度主要有10米，12米和13米，主要采用68*122mm为主要型材，5米一间，一般檐高3米或4米。常用于中型的聚会派对、展会或仓储。常用配套包括：透明PVC窗户，硬体墙，地板，纱幔等。

Medium sized A shaped tent is 10m, 12m and 13m, which uses 68*122mm aluminum alloy as main frame. The standard eave height is commonly 3m to 4m. Standard bay distance is 5 meters. Usually it is applicable for medium party weddings, exhibitions and warehouse. Customers can choose below facilities: clear PVC window, hard walls, floor, curtains., etc.

截面图 Cross Section View

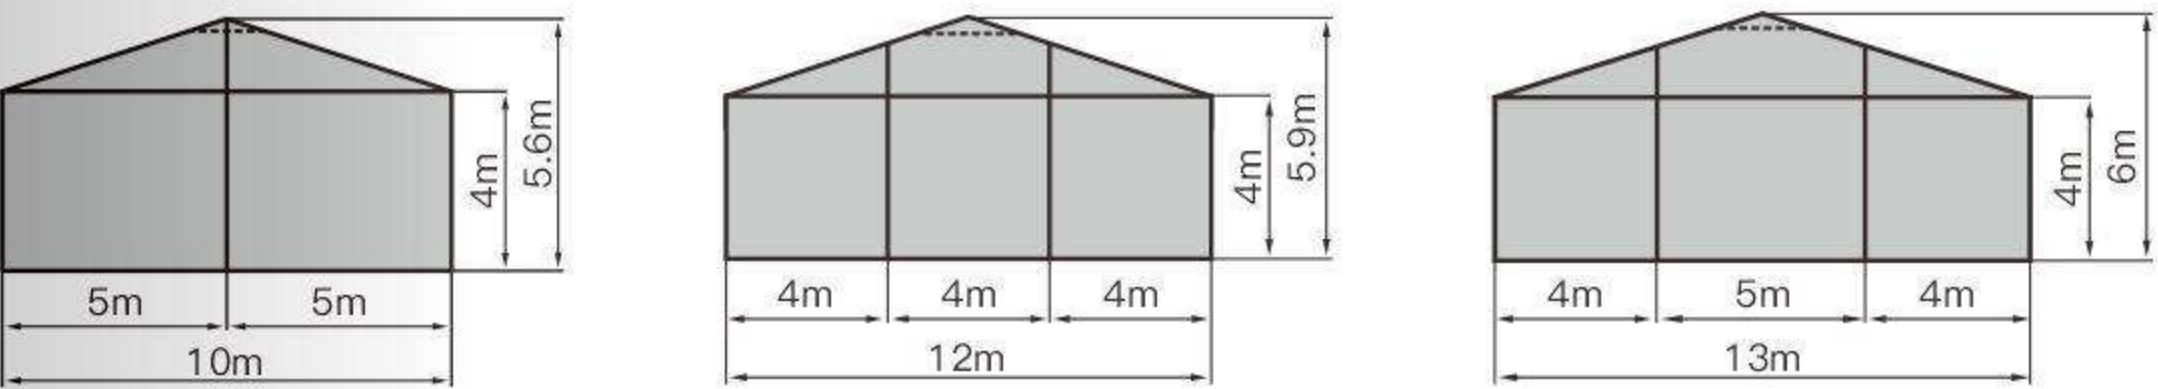

框架规格 Specification


跨度 Clear-span width	10m/12m/13m
边高 Eave height	3m/4m
顶高 Ridge height	5.6m/5.9m/6m
间距 Bay distance	5m
坡度 Roof pitch	18°
最长件 Longest component	6m/6.3m/6.6m
最小长度 Minimum length	5m
最大长度 Maximum length	无限制 No limited
风荷载 Max allowed windspeed	102公里/小时 102km/h

篷布规格 Cover Material

PVC篷布 PVC polyester textile
双面涂层PVC布，650–850g/m² 防火阻燃，符合DIN4102、M2和B1标准
Double coated PVC polyester textile. Flame retardant to DIN 4102,M2, Grade B1. Weight of fabric is 650g/sqm, 750g/sqm or 850g/sqm.

可选配件 Optional Accessories


• 布幔 Curtain lining	• 空调 Air conditioner
• 灯具 Lighting	• 钢钎 Steel nails
• 玻璃门 Glass doors	• 地毯 Carpet
• 天沟布 Rain gutter	• 透明布 Transparent PVC cover and sidewall
• 地板系统 Floorings	• 承重盘 Weight plate
• 透明窗户 PVC window sidewalls	• ABS墙体 ABS walls
• 玻璃墙体 Glass walls	• 三明治墙体 Sandwich walls

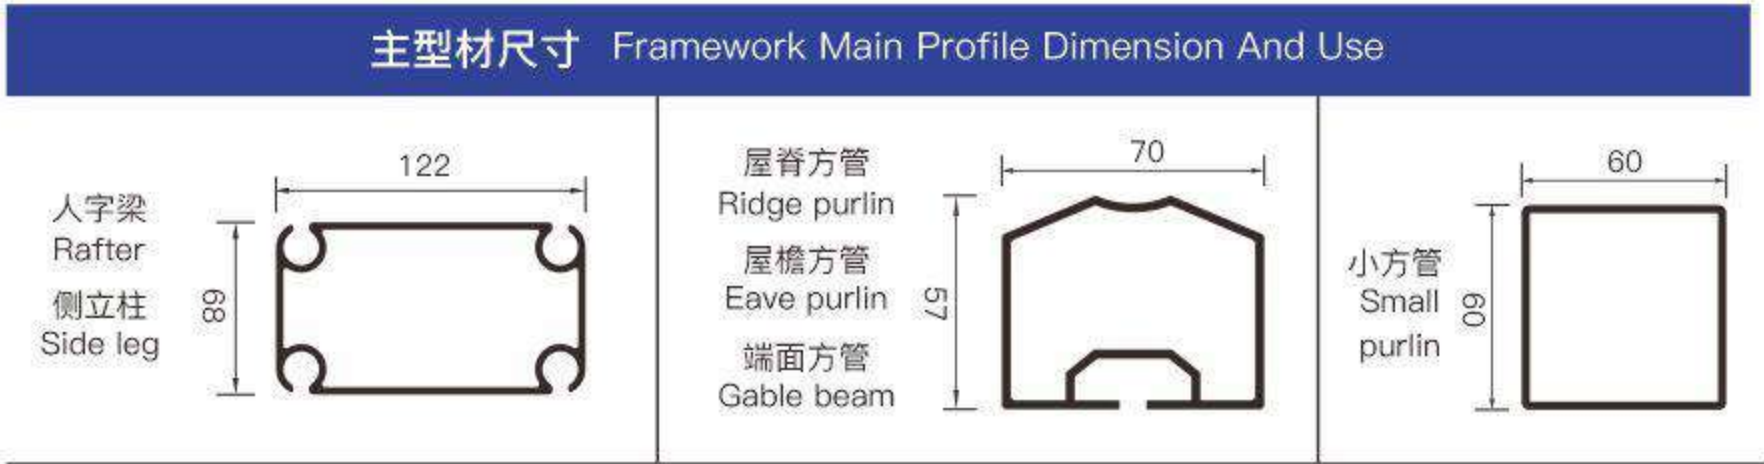



> 15–18m Middle Tent Series

中型A型篷房常见的跨度还有15米，16米和18米，主要采用108*150mm为主要型材，5米一间，一般檐高3米或4米。常用于中型的聚会派对、展会或仓储。常用配套包括：透明PVC窗户，硬体墙，地板，纱幔等。

15m, 16m and 18m are also the commonly used Medium A shaped tent, which uses 108*150mm aluminum alloy as main frame. The standard eave height is commonly 3m to 4m. Standard bay distance is 5 meters. Usually it is applicable for medium party weddings, exhibitions and warehouse. Customers can choose below facilities: clear PVC window, hard walls, floor, curtains., etc.

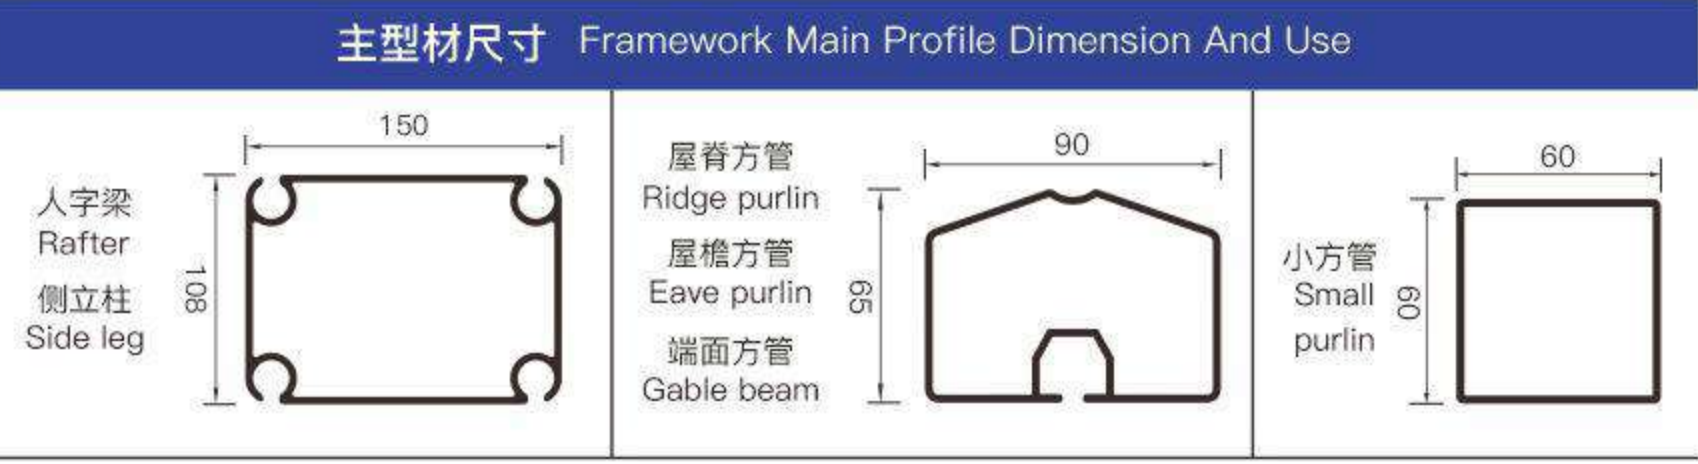

截面图 Cross Section View

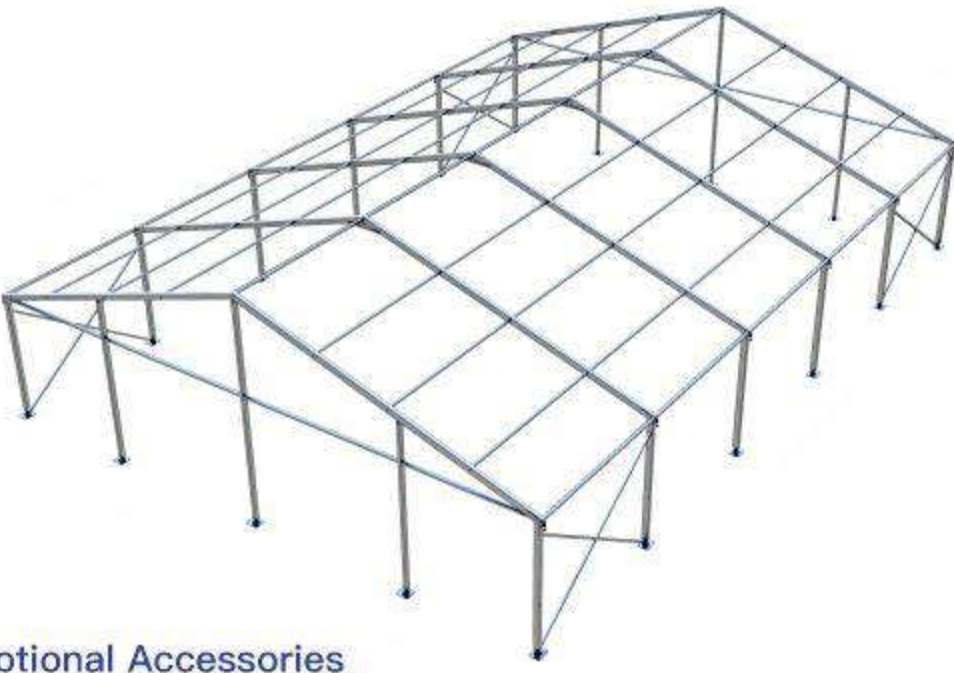
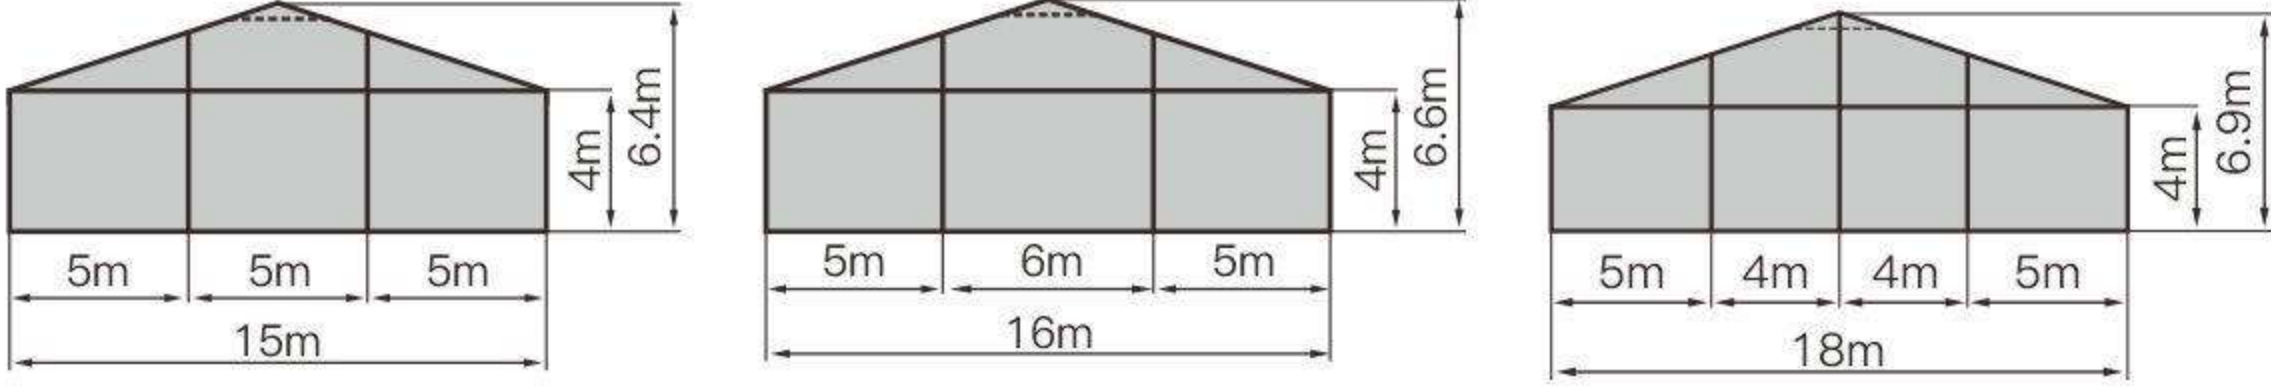


框架规格 Specification		篷布规格 Cover Material	可选配件 Optional Accessories	
跨度 Clear-span width	15m/16m/18m	PVC篷布 PVC polyester textile 双面涂层PVC布，650–850g/㎡ 防火阻燃，符合DIN4102、M2和B1标准 Double coated PVC polyester textile. Flame retardant to DIN 4102,M2, Grade B1. Weight of fabric is 650g/sqm, 750g/sqm or 850g/sqm.	• 布幔 Curtain lining	• 空调 Air conditioner
边高 Eave height	3m/4m		• 灯具 Lighting	• 钢钎 Steel nails
顶高 Ridge height	6.4m/6.6m/6.9m		• 玻璃门 Glass doors	• 地毯 Carpet
间距 Bay distance	5m		• 天沟布 Rain gutter	• 透明布 Transparent PVC cover and sidewall
坡度 Roof pitch	18°		• 地板系统 Floorings	• 承重盘 Weight plate
最长件 Longest component	8.1m/8.7m/8.9m		• 透明窗户 PVC window sidewalls	• ABS墙体 ABS walls
最小长度 Minimum length	5m		• 玻璃墙体 Glass walls	• 三明治墙体 Sandwich walls
最大长度 Maximum length	无限制 No limited			
风荷载 Max allowed windspeed	102公里/小时 102km/h			



> 18–25m Large Tent Series

大型A型篷房跨度主要有18米，20米，21米和25米，采用112*203mm为主要型材，5米一间，一般檐高3米，4米或5米。常用于大型的聚会派对、展会、体育赛事或仓储。常用配套包括：透明PVC窗户，硬体墙，地板，纱幔等。

Large sized A shaped tent is 18m,20m, 21m and 25m, which uses 112*203mm aluminum alloy as main frame. The standard eave height is commonly 3m, 4m to 5m. Standard bay distance is 5 meters. Usually it is applicable for large party weddings, exhibitions, sports and warehouse. Customers can choose below facilities: clear PVC window, hard walls, floor, curtains., etc.

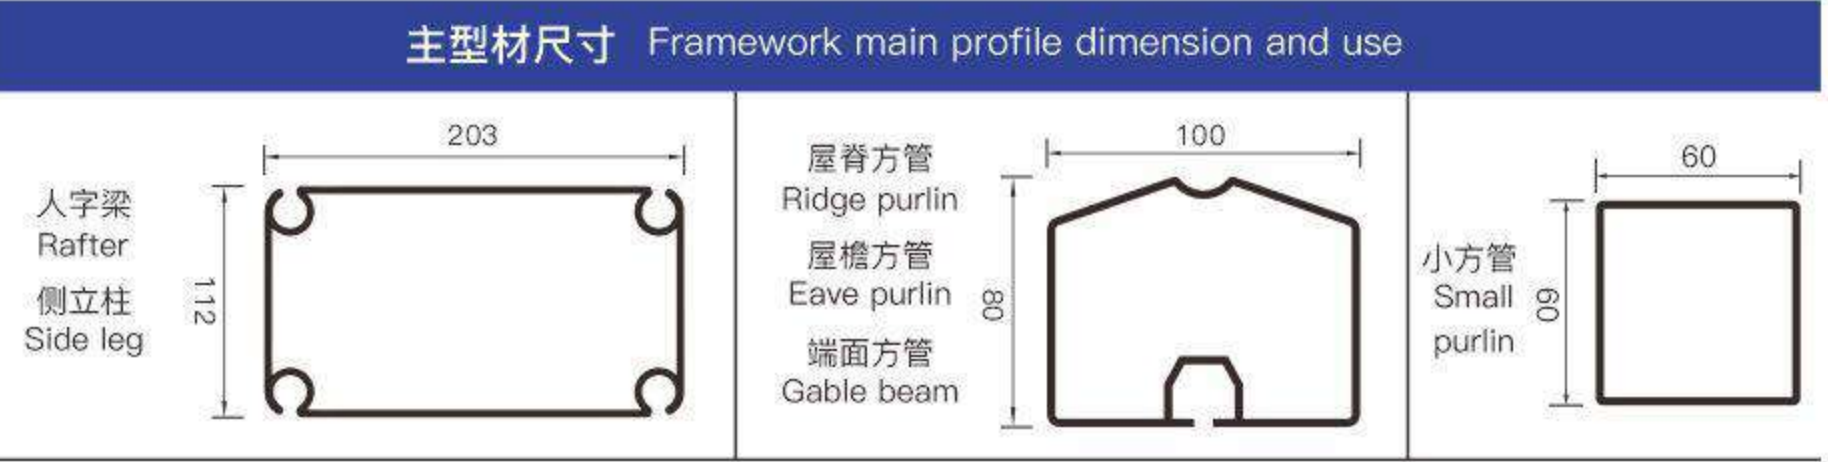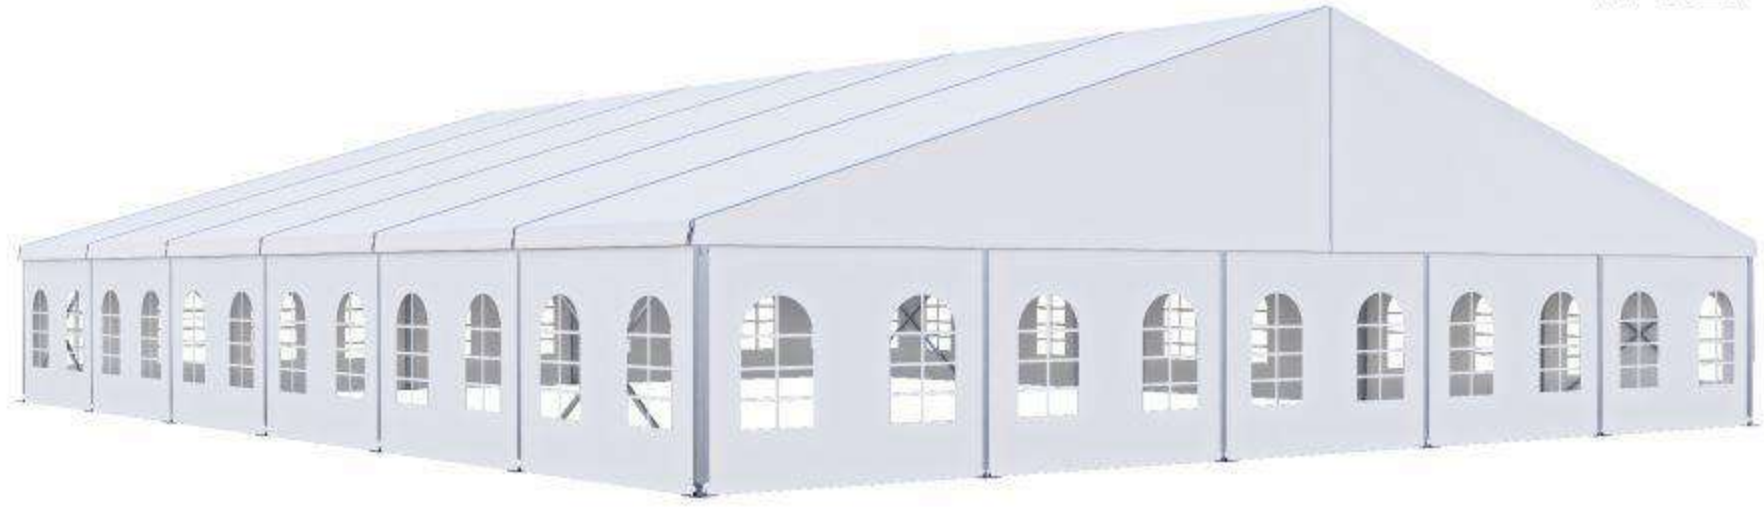

截面图 Cross Section View

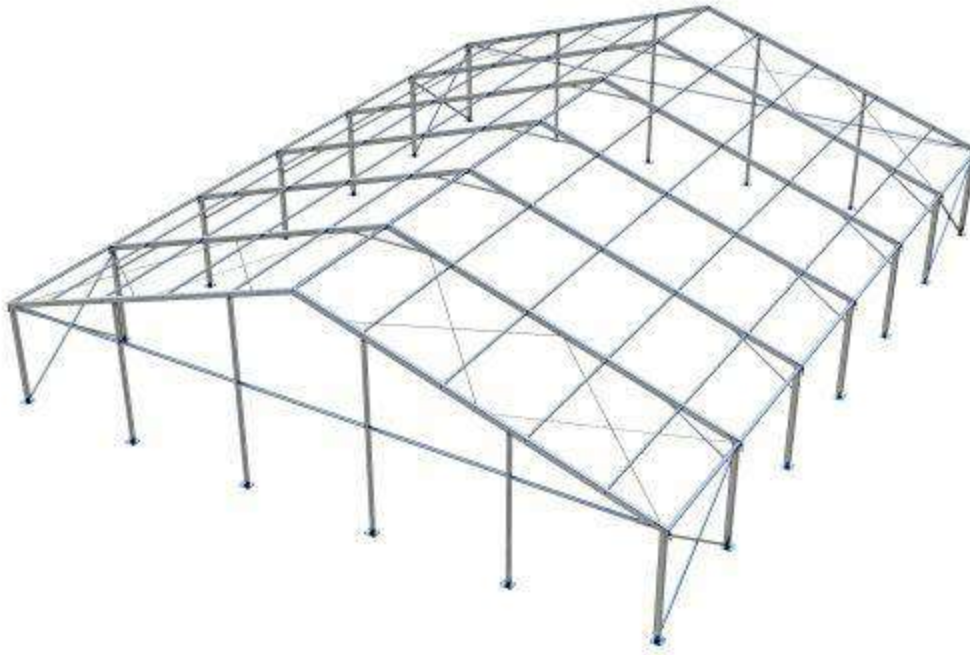
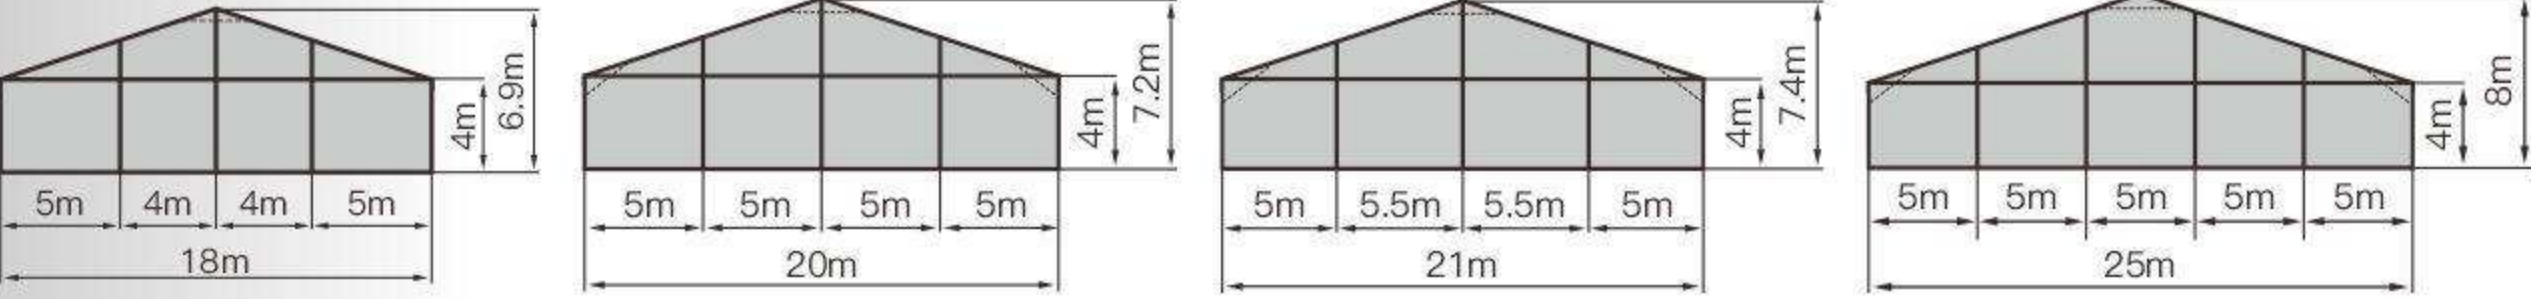


框架规格 Specification		篷布规格 Cover Material	可选配件 Optional Accessories	
跨度 Clear-span width	18m/20m/21m/25m	PVC篷布 PVC polyester textile 双面涂层PVC布，650–850g/㎡ 防火阻燃，符合DIN4102、M2和B1标准 Double coated PVC polyester textile. Flame retardant to DIN 4102,M2, Grade B1. Weight of fabric is 650g/sqm, 750g/sqm or 850g/sqm.	• 布幔 Curtain lining	• 空调 Air conditioner
边高 Eave height	4m		• 灯具 Lighting	• 钢钎 Steel nails
顶高 Ridge height	6.9m/7.2m/7.4m/8m		• 玻璃门 Glass doors	• 地毯 Carpet
间距 Bay distance	5m		• 天沟布 Rain gutter	• 透明布 Transparent PVC cover and sidewall
坡度 Roof pitch	18°		• 地板系统 Floorings	• 承重盘 Weight plate
最长件 Longest component	8.9m/10.6m/11.2m/13m		• 透明窗户 PVC window sidewalls	• ABS墙体 ABS walls
最小长度 Minimum length	5m		• 玻璃墙体 Glass walls	• 三明治墙体 Sandwich walls
最大长度 Maximum length	无限制 No limited			
风荷载 Max allowed windspeed	102公里/小时 102km/h			




> 30m Huge Tent Series



截面图 Cross Section View

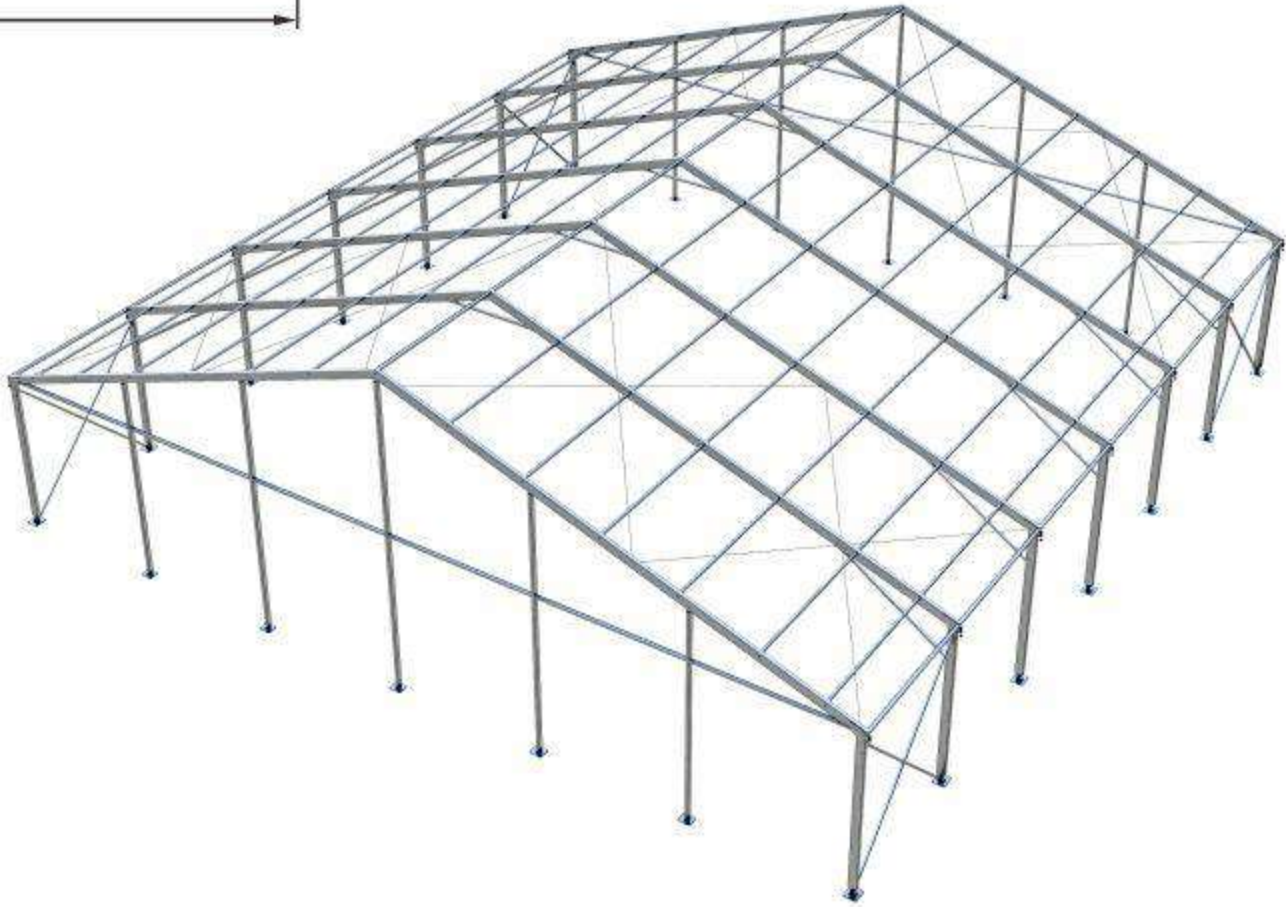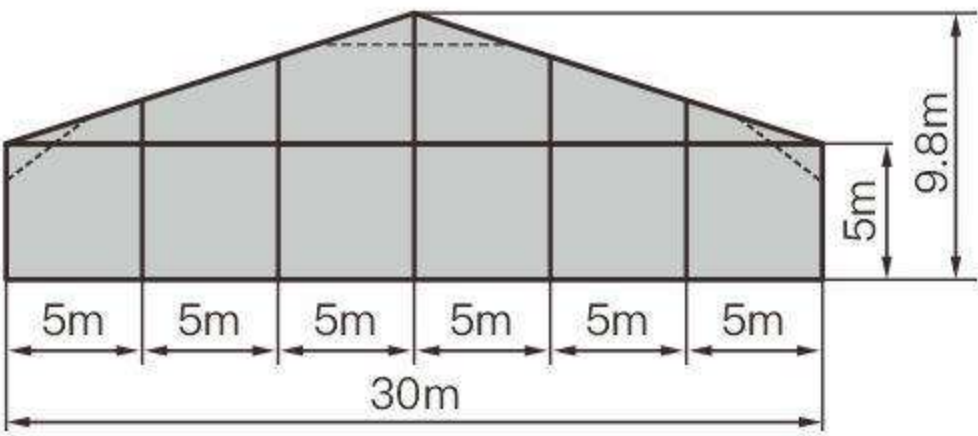

主型材尺寸 Framework Main Profile Dimension And Use

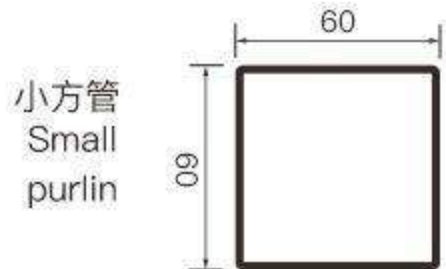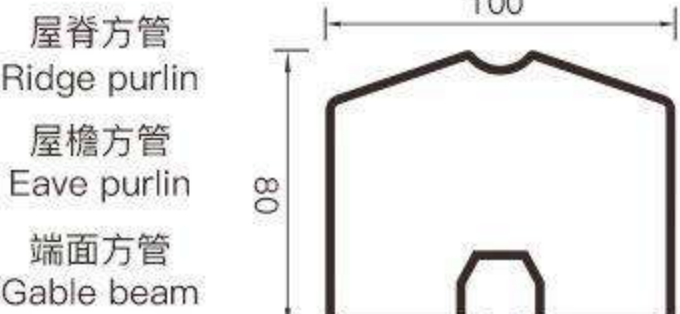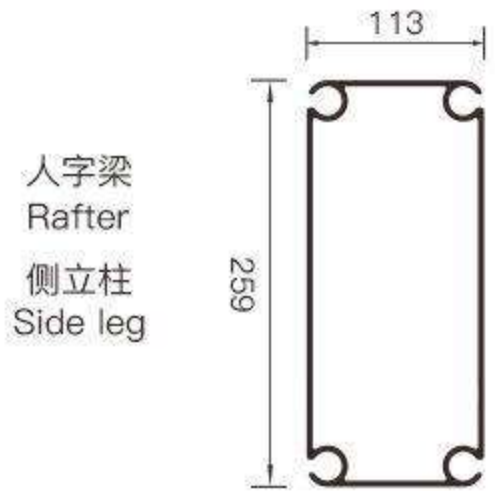

框架规格 Specification

跨度 Clear-span width	30m
边高 Eave height	5m
顶高 Ridge height	9.8m
间距 Bay distance	5m
坡度 Roof pitch	18°
最长件 Longest component	10.5m
最小长度 Minimum length	5m
最大长度 Maximum length	无限制 No limited
风荷载 Max allowed windspeed	102公里/小时 102km/h

篷布规格 Cover Material

PVC篷布
PVC polyester textile
双面涂层PVC布, 650-850g/m²
防火阻燃, 符合DIN4102、M2和B1标准
Double coated PVC polyester textile.
Flame retardant to DIN 4102,M2, Grade B1.
Weight of fabric is 650g/sqm,
750g/sqm or 850g/sqm.



可选配件 Optional Accessories

- 布幔 Curtain lining
- 灯具 Lighting
- 玻璃门 Glass doors
- 天沟布 Rain gutter
- 地板系统 Floorings
- 透明窗户 PVC window sidewalls
- 玻璃墙体 Glass walls
- 空调 Air conditioner
- 钢钎 Steel nails
- 地毯 Carpet
- 透明布 Transparent PVC cover and sidewall
- 承重盘 Weight plate
- ABS墙体 ABS walls
- 三明治墙体 Sandwich walls



> 40m Huge Tent Series



截面图 Cross Section View

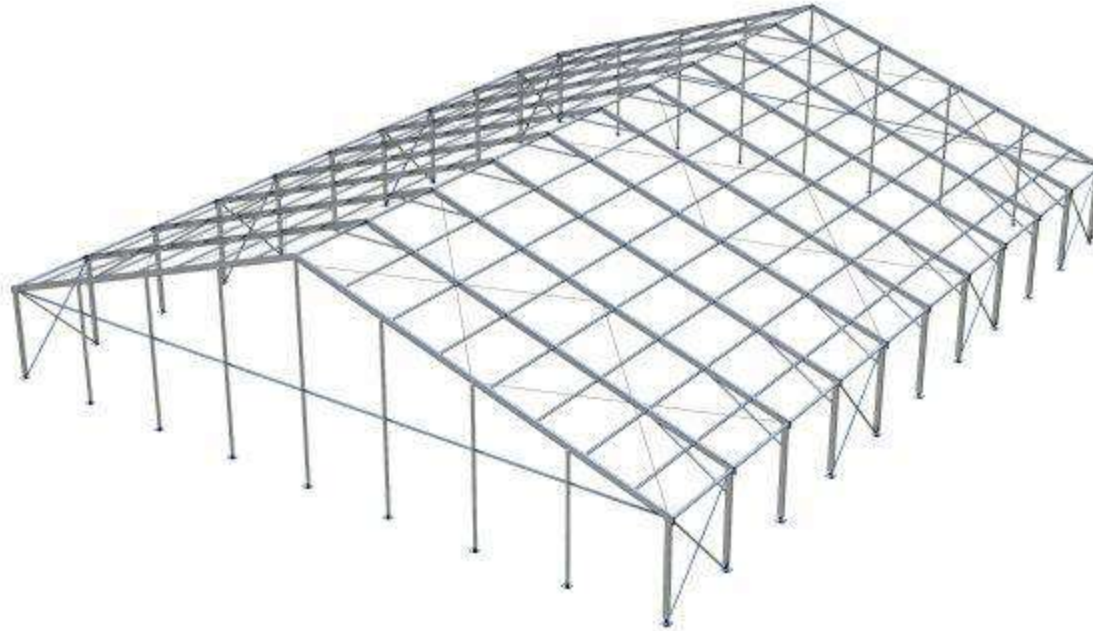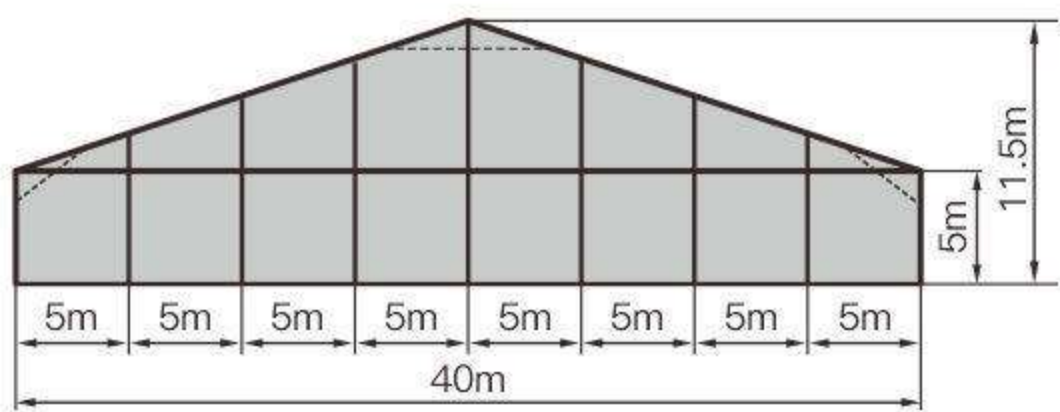

主型材尺寸 Framework Main Profile Dimension And Use

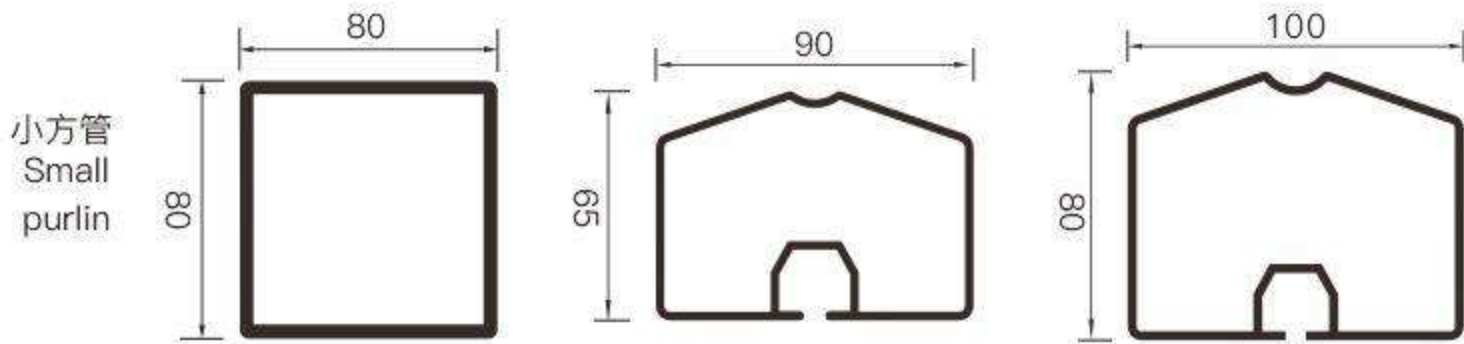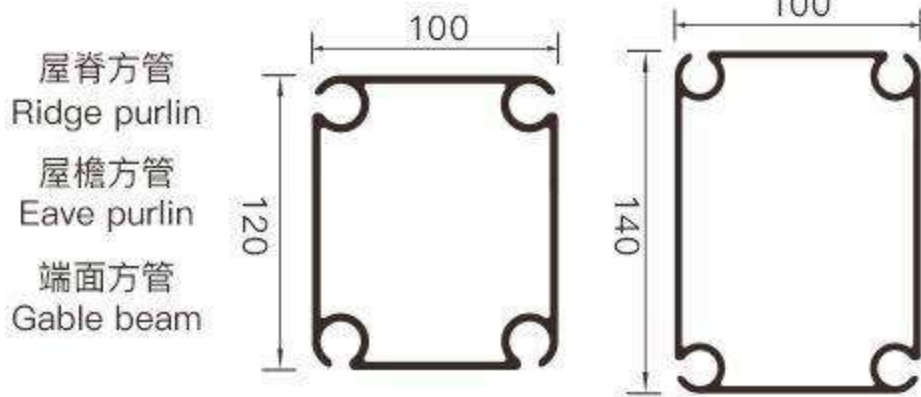

框架规格 Specification

跨度 Clear-span width	40m
边高 Eave height	5m
顶高 Ridge height	11.5m
间距 Bay distance	5m
坡度 Roof pitch	18°
最长件 Longest component	10.5m
最小长度 Minimum length	5m
最大长度 Maximum length	无限制 No limited
风荷载 Max allowed windspeed	102公里/小时 102km/h


篷布规格 Cover Material

PVC篷布
PVC polyester textile
双面涂层PVC布, 650-850g/m²
防火阻燃, 符合DIN4102、M2和B1标准
Double coated PVC polyester textile.
Flame retardant to DIN 4102,M2, Grade B1.
Weight of fabric is 650g/sqm,
750g/sqm or 850g/sqm.


可选配件 Optional Accessories

- 布幔 Curtain lining
- 灯具 Lighting
- 玻璃门 Glass doors
- 天沟布 Rain gutter
- 地板系统 Floorings
- 透明窗户 PVC window sidewalls
- 玻璃墙体 Glass walls
- 空调 Air conditioner
- 钢钎 Steel nails
- 地毯 Carpet
- 透明布 Transparent PVC cover and sidewall
- 承重盘 Weight plate
- ABS墙体 ABS walls
- 三明治墙体 Sandwich walls



> 50m Huge Tent Series

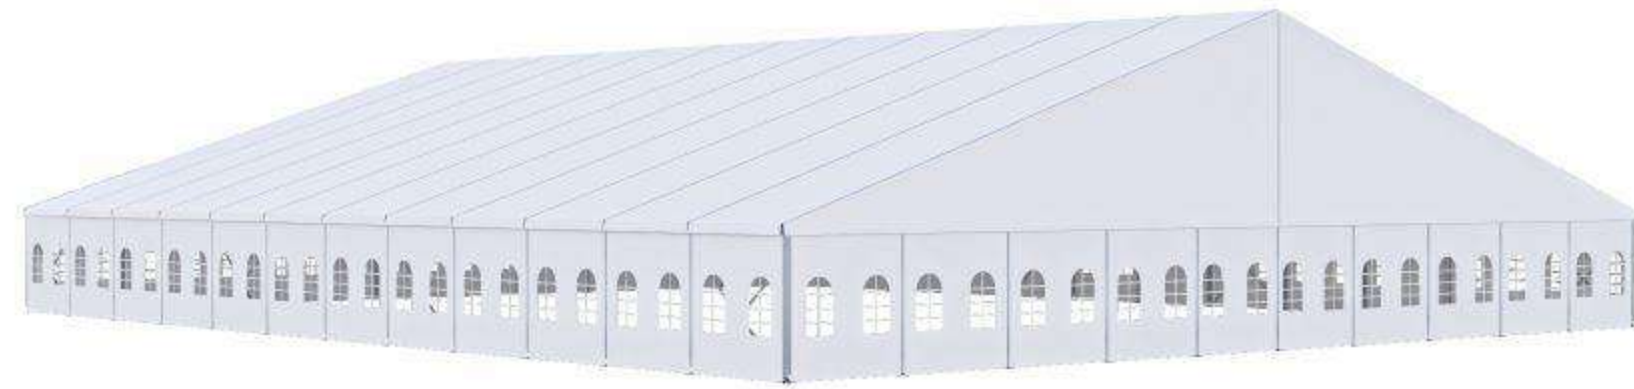

截面图 Cross Section View

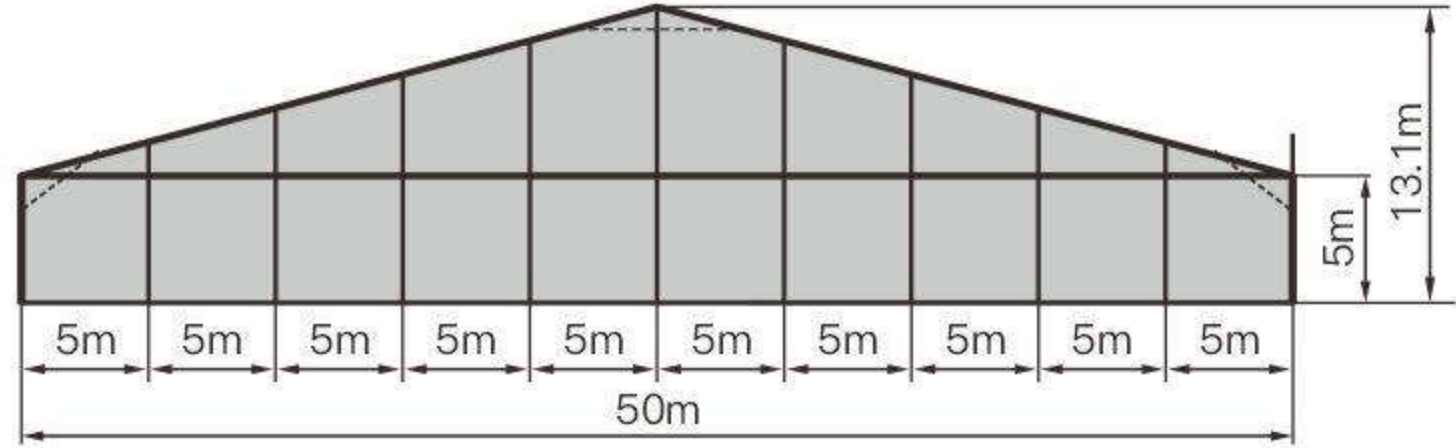

主型材尺寸 Framework Main Profile Dimension And Use

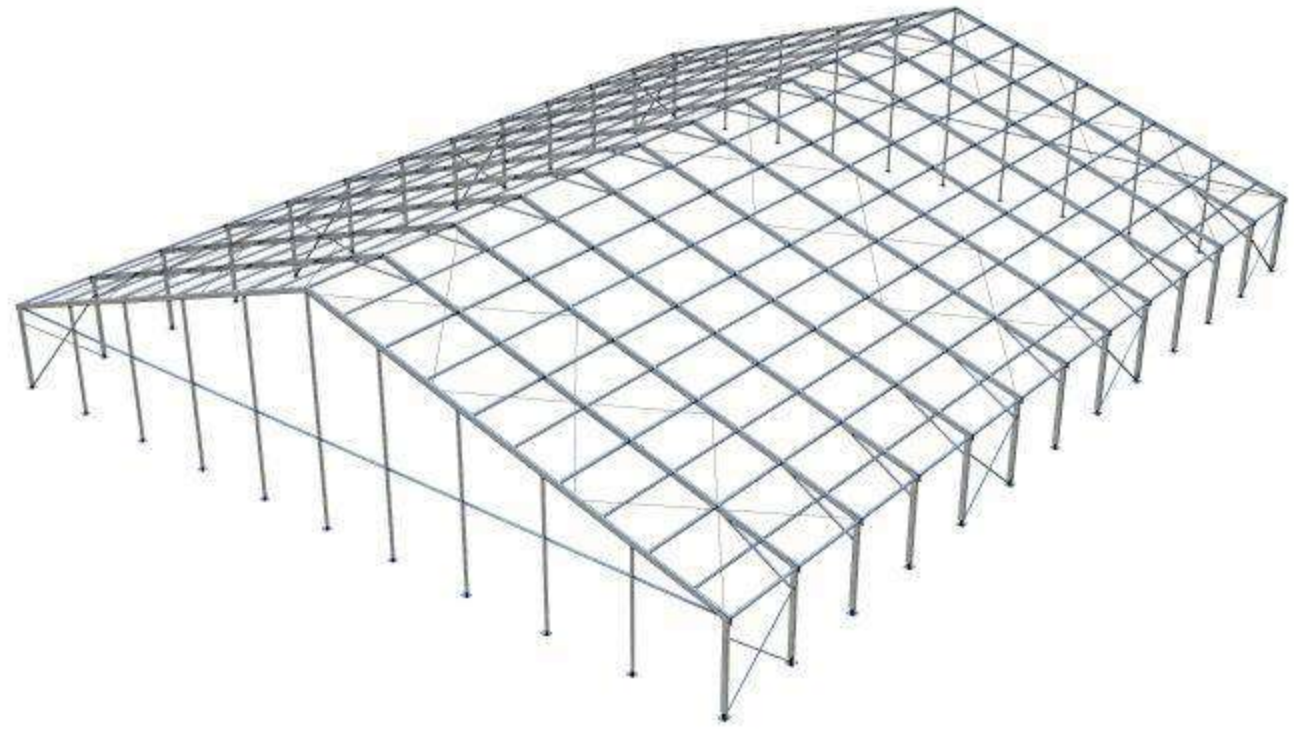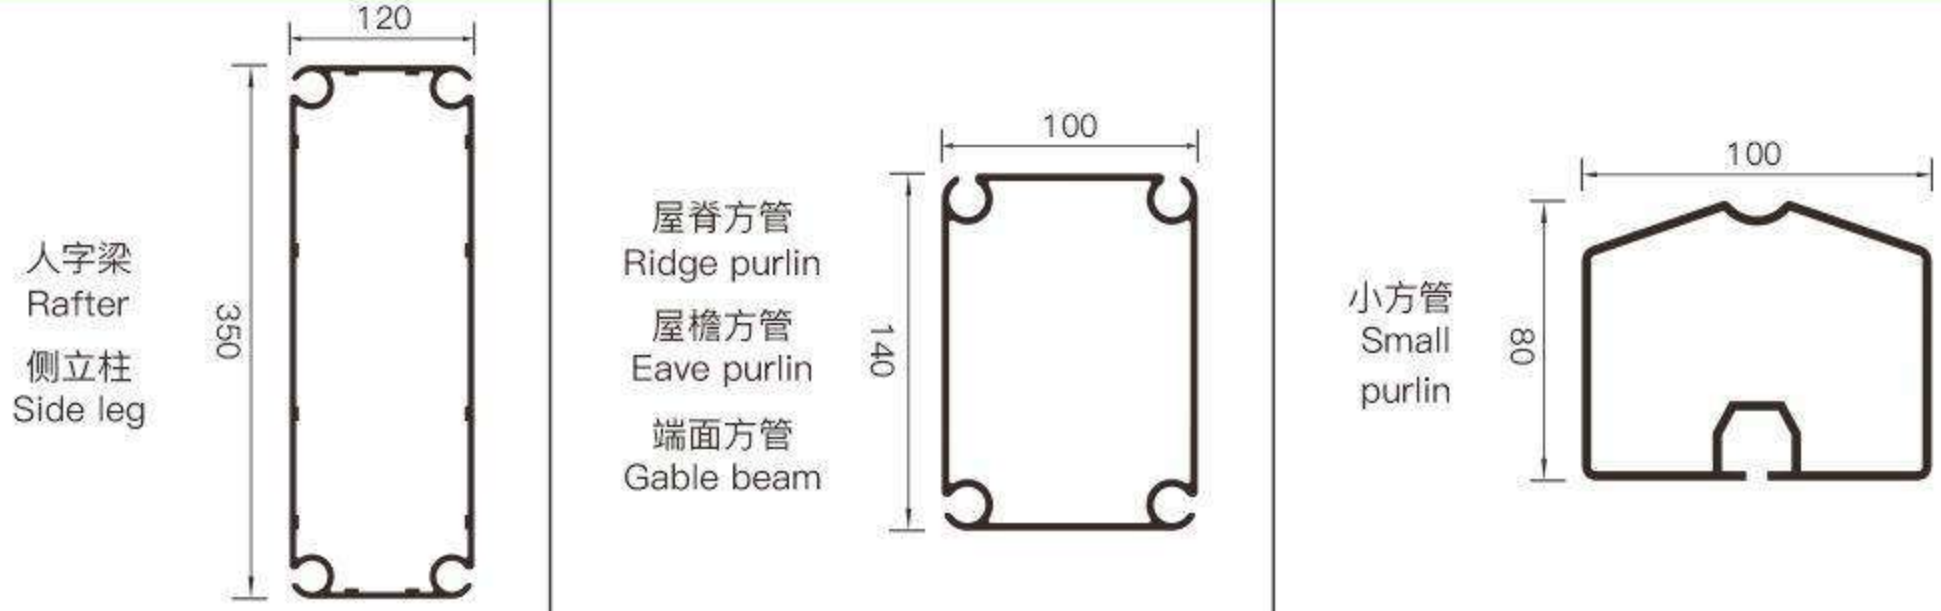

框架规格 Specification

跨度 Clear-span width	50m
边高 Eave height	5m
顶高 Ridge height	13.1m
间距 Bay distance	5m
坡度 Roof pitch	18°
最长件 Longest component	13m
最小长度 Minimum length	5m
最大长度 Maximum length	无限制 No limited
风荷载 Max allowed windspeed	102公里/小时 102km/h


篷布规格 Cover Material

PVC篷布
PVC polyester textile
双面涂层PVC布, 650-850g/m²
防火阻燃, 符合DIN4102、M2和B1标准
Double coated PVC polyester textile.
Flame retardant to DIN 4102,M2, Grade B1.
Weight of fabric is 650g/sqm,
750g/sqm or 850g/sqm.

可选配件 Optional Accessories

- 布幔 Curtain lining
- 灯具 Lighting
- 玻璃门 Glass doors
- 天沟布 Rain gutter
- 地板系统 Floorings
- 透明窗户 PVC window sidewalls
- 玻璃墙体 Glass walls
- 空调 Air conditioner
- 钢钎 Steel nails
- 地毯 Carpet
- 透明布 Transparent PVC cover and sidewall
- 承重盘 Weight plate
- ABS墙体 ABS walls
- 三明治墙体 Sandwich walls

> A型篷的搭建演示 Installations

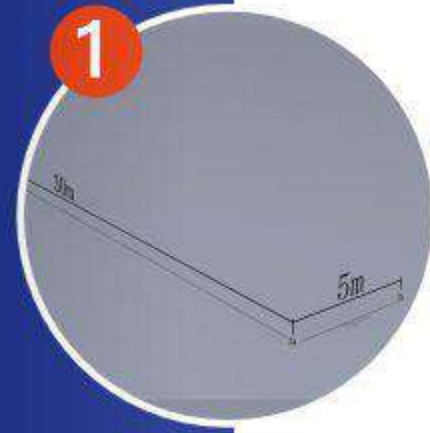

STEP.1
测量场地并定位地脚
Measure the site and
locate the base plate



STEP.2
部件摆放
Set all parts
(base, leg, rafter, crown)



STEP.3
人字梁与过渡接头
Connect rafters
and crowns



STEP.4
人字梁与立柱连接
Connect rafters
and legs



STEP.5
连接完毕
Connect completed



STEP.6
立起端面
Raise other
arches



STEP.7
第二片直立固定
Fix the first bay



STEP.8
方管固定
Fix the purlins
on rafters



STEP.9
重复5-8步骤, 框架完成
Repeat 5-8 steps
structure completed



STEP.10
拉顶布
Pull up the roof fabric



STEP.11
压帘丝杆 固定顶布
Strengthen the
roof fabric



STEP.12
顶布安装完毕
Fabric completed



STEP.13
安装山肩布及围布
Pull the wall fabric
and the triangle fabric



STEP.14
地脚固定
Fix all the bases



STEP.15
安装结束
Installation
completed